WHY SHOULD GUTTERS MOVE?

To prevent water from seeping into the house.

Like many types of building materials installed outdoors for an extended period of time, gutters are prone to thermal contraction and expansion likely to compromise their watertightness, including with:

Unsealed Screw Holes



Kink & Tear



Leaky Corners



double pro®

SAME HANGER, BUT WITH A BUILT-IN GUTTER GUARD







♦hover[™]

THE ONLY HANGER
THAT LETS GUTTERS
MOVE




Careful design that addresses the stress on gutters by Mother Nature



With the **floating** TECHNOLOGY, gutters can be suspended from the building fascia without even puncturing them. As a result, they maintain integrity and are free to change shapes.

The spring back TECHNOLOGY will prevent gutter distortion under a weight of over 400 lb per linear foot, by distributing the pressure along the entire length of the Hover continuous hanger.

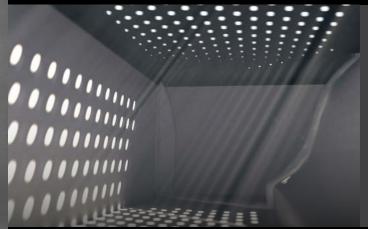



Higher UV-ray filtration extends the elastic properties of the gutter sealant and reduces drying, cracking and leakage at each end of the rain water management system.

The *hover includes a lifetime warranty on sturdiness and features several patented technologies ensuring gutters are leak-proof, resilient and able to withstand bad weather.

More details on alu-rex.com/hover