

# H-6000





## 6 IN. FLOATING CONTINUOUS HANGER FOR HEMMED BACK GUTTERS

#### **PRODUCT**

- Product for hemmed back rain gutters
- · Supports the gutter without screwing through it
- Supports 421 lbs (190 kg)/linear foot
- · Allow gutters to move with temperature changes
- Uniform support across the entire length
- · Lifetime warranty on material and sturdiness
- 25-year anti-clog warranty
- · Invisible from the ground
- · Package contains:
  - -7.5' (2.29 m) x 34 pcs = 255' (77.7 m)
  - 300 screws (see description below)
  - 12 end trims (see description below)

## **PERFORATIONS**

- 7/64" (2.8 mm) in diameter
- · Drains 36" (914 mm) of water per hour
- Offers the perfect balance between maximum drainage and debris protection without puncturing the gutter

1/2"		<b></b>	0 -	0	0	0	0	0	0	0	0	0	
		6	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
	0	0	0	0	0	0	0	0	0	0	0	0	
atio 1·2	O Ra	0	0	0	0	0	0	0	0	0	0	0	

## **ALUMINUM**


- · Color: Carbon Black B95
- · Grade: 3105 H24
- · Thickness: 0.0175" (including finish)

# intertek

View the results of our independent drainage, resistance, and wind tunnel tests at www.alu-rex.com/en/tests.

Tolerances x.xxx" = +/- 0.005" (0.127 mm) x.xxxx" = +/- 0.0005" (0.0127 mm)

#### **6" GUTTER PROFILE**

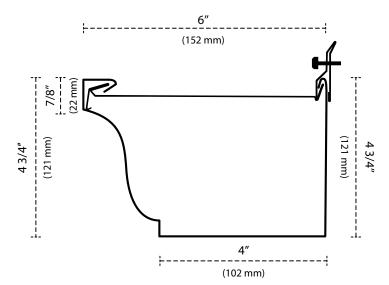

# This product is protected by a number of patents.

# DEST. 1.125" (125 mm) (1.125 mm) (1.125 mm)

# **SCREWS**

 This hanger is installed with black self-sealing screws made of zinc #10 -1½" (38 mm) with ¼" (6.4 mm) hexagon heads and integrated rubber gaskets.



# **END TRIMS**

 At the end cap of the gutter, an end trim is installed to leave a gap for the gutters heat distorsion.



